

TRS550HD - TRS550DVHD

trasporter transporter

Motore	Trasmissione TRS550HD	Trasmissione TRS550DVHD	Portata	Cassone con ribaltamento idraulico	Cingolo	Appoggio a terra	Peso TRS550HD	Peso TRS550 DVHD
Benzina da 6 a 6,3 KW (8,2-8,4 HP)	Idraulica N° 2 pompe cc. 3,2 (l/min. 7,7)	Idraulica N° 2 pompe cc. 3,5 (l/min. 8,5) ciascuna N° 1 pompe cc. 2,1 (l/min. 5,2)	Kg. 550	Dim. esterne mm 720x970x320 apribile	mm 180x72x31	mm 750x180	Kg. 290	Kg. 295
Engine	Transmission TRS550HD	Transmission TRS550DVHD	Loading	Hydraulic tip-up body	Track	Ground support	Weight TRS550HD	Weight TRS550 DVHD
Petrol from 6 to 6,3 KW (8,2-8,4 HP)	Hydraulic N° 2 pumps cc. 3,2 (l/min. 7,7)	Hydraulic N° 2 pumps cc. 3,2 (l/min. 7,7)	Kg. 550	Ext. dimension mm 720x970x320 extensible	mm 180x72x31	mm 750x180	Kg. 290	Kg. 295




Cassone dumper (accessorio)
Pala autocaricante (accessorio)
Dumper version (implement)
Self folder (implement)

Sponde apribili autolivellanti
Opening sides



Sponda posteriore apribile basculante
Opening tail board

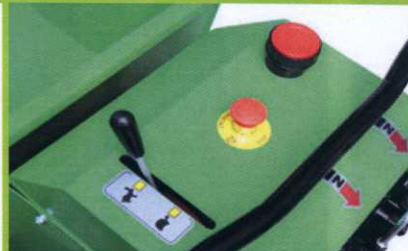

Leva comando doppia velocità versione
TRS550 DV
Double speed lever TRS550 DV model

Comandi ergonomici
Pedana operatore
(accessorio)
Folding platform
(implement)

